

Cat 6A U/FTP

Insulation Colour

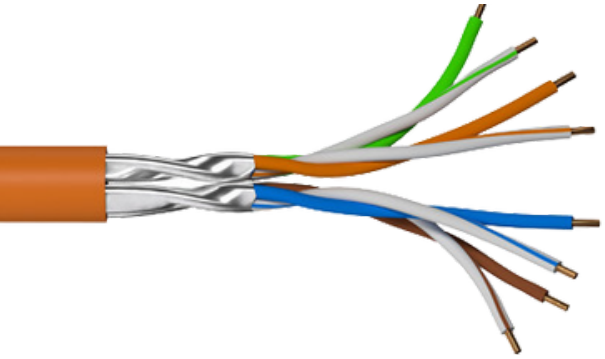

Construction

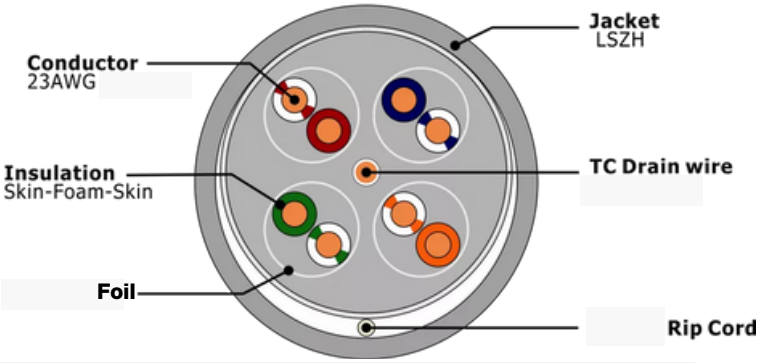

Description/Order Information:

Part No.: EUF6AL-0423-WH

Cat 6A U/FTP, 4 foil-covered twisted pairs, with tinned Copper drain wire LSZH Sheathing, White.

Packaging: 500 m - Coil on Drum

كابل Cat 6A U/FTP, 4 أزواج مجدولة, مغلفة بالألومينيوم 23 AWG مع سلك نحاسي معالج و سترة غلاف LSZH, أبيض.

التغليف: 500 متر - كابل على اسطوانة خشبية

Standard Compliance:

TIA/EIA 568 C-2

EN 50173:2007 EN 50288-3-1:2013

ISO/IEC 11801 First Edition - 2017

ISO/IEC 11801 Second Edition - 2017

UL444, UL1581, UL1666

Flame Test: IEC 60332-1, IEC 60332-3C

Pass fluke > 90 m , Fluke Test 8000

Applications & Environment

10 BASE-T (Ethernet), 100 BASE-T (Fast Ethernet)

1000 BASE-T (Gigabit Ethernet)

10G BASE-T (10 Gigabit Ethernet)

100 Mbps TP-PMD (ANSI X3T9.5)

155 Mb/s ATM, 622 Mb/s ATM, 1.2 Gb/s ATM

4/16 Token Ring, POE, POE+

ISDN, Data Centres, Voice, Videos, digital and analogue data transmission up to 500 MHz

RFI or EMI Noise

Supporting up to 90 metres

Flame retardance : LSZH

Operation temperature : -20 C ... to .. 70C

Construction:

Conductor: 23 AWG Solid Copper , diameter 0.57 (+/- 0.005) mm

Purity : 99.99%

Insulation: Compressed Foam-Skin PE

Pairs: 4 Twisted Pairs with foil skin around each pair

TC Drain Wire


Sheath: LSZH, 0.55 (+/- 0.05) mm thick

Color : White

Outer Diameter: 6.9 mm

Packing Unite :

Unite Type of Package 1	PCE
Number of Unite in Package	1
Package 1 Weight :	27 Kg
Package 1 height :	39.5 cm
Package 1 Width :	38 cm



Offer Sustainability :

Toxic Heavy metal free :	YES
Mercury free :	YES